



HT32F65C40F_Driver Board Hardware Description

Revision: V1.00 Date: August 20, 2024


[**www.holtek.com**](http://www.holtek.com)

Table of Contents

1. General Description	3
2. Schematics	6
2.1 HT32F65C40F Peripheral Component Reference Circuit.....	6
2.2 Over Current Protection Circuit and Current Sensing Circuit.....	6
2.3 Hall Sensor Feedback Circuit.....	7
2.4 VR Variable Resistor Circuit.....	8
2.5 Programming Interface and Motor Workshop Communication	8
2.6 VCC Buck Resistors.....	10
2.7 RF Receiver Module	10
2.8 MCU Pin Function Definition.....	11
3. PCB Layout	12
4. BOM List	14


1. General Description

The HT32F65C40F_Driver Board front view is shown below. The component parts are: (1) Input electrolytic capacitor. (2) 5V LDO output capacitor. (3) Over-current comparator input low-pass filter capacitors. (4) Hall sensor connection ports. (5) VR variable resistor. (6) Reset button. (7) SW2 button. (8) SWD programming interface. (9) VCC buck resistors. (10) HT32F65C40F MCU. (11) Motor workshop communication interface. (12) RF receiver module. By default, this hardware board does not include this module. (13) Differential OPA current amplifier external components. (14) Current sampling resistors. (15) Input DC voltage terminal. (16) Motor coil terminal.

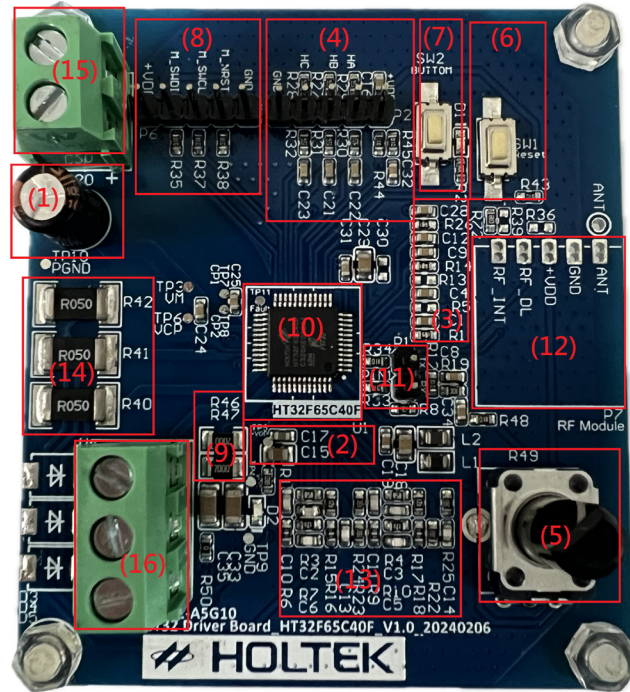


BLDC Motor Workshop HT32F65C40F_Driver Board Front View

The HT32F65C40F_Driver Board back view is shown below. Bare copper and PCB through-holes are added below the MCU, which can effectively and quickly dissipate heat to the surrounding air to improve heat dissipation.

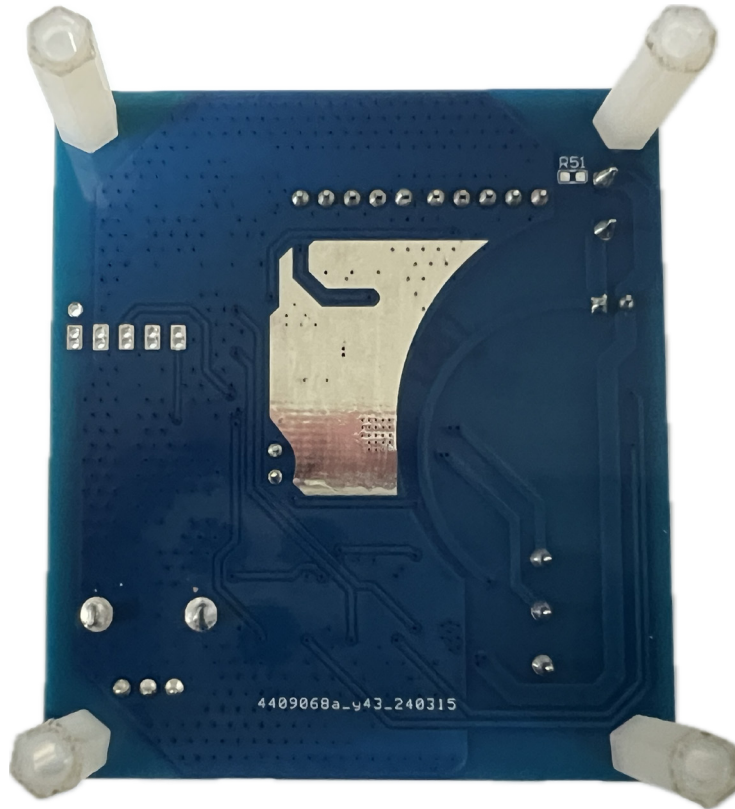

BLDC Motor Workshop HT32F65C40F_Driver Board Back View

The figure below shows the HT32F65C40F_Driver Board development environment. Connect the PC USB port to the e-Link32 Pro using a Mini USB cable and then connect the e-Link32 Pro to the HT32F65C40F_Driver Board to communicate with the BLDC motor workshop. The input voltage range is DC 12V~32V.

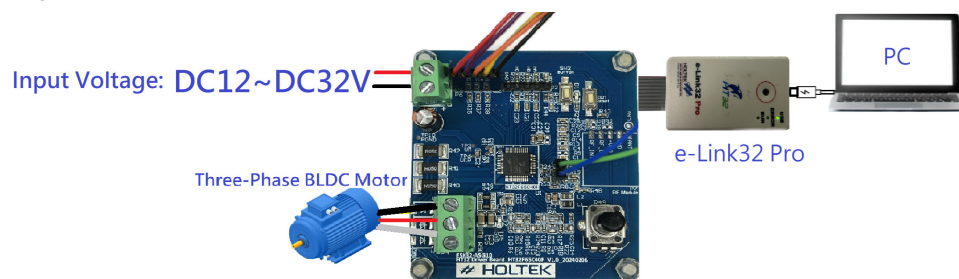


HT32F65C40F_Driver Board Development Environment

Features

- Input voltage: DC 12V~32V
- Max. DC Bus current: 1A
- Max. motor phase current: $\pm 3.5A$
- R_Shunt (Phase): $0.05\Omega/2512/1\%/2W$
- DC Bus voltage divider ratio: 1/10
- Gate-Driver Polarity:
 - (1) Low side active low
 - (2) High side active high

As the above feature shows, the HT32F65C40F_Driver Board maximum motor phase current is $\pm 3.5A$. The following figure shows the phase current sampling OPA circuit. The default hardware parameters are shown as follows:

- (1) HT32F65C40F_Driver Board R40, R41 and R42 specifications are all $0.05\Omega/2512/\pm 1\%/2W$.
- (2) HT32F65C40F_Driver Board R6, R9, R16 and R18 specifications are all 180Ω .
- (3) HT32F65C40F_Driver Board R7, R10, R15 and R17 specifications are all 820Ω .
- (4) HT32F65C40F_Driver Board R3 and R4 specifications are both $7.5K\Omega$.
- (5) HT32F65C40F_Driver Board R22, R23, R24 and R25 specifications are all $15K\Omega$.

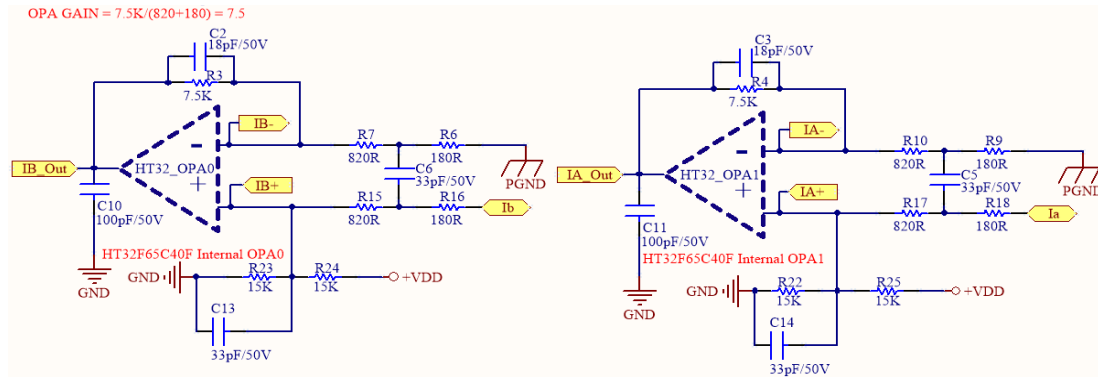


Phase Current Sampling OPA Circuit

2. Schematics


This chapter will present the schematics and explain the HT32F65C40F_Driver Board hardware circuit as shown in sections 2.1 to 2.8.

2.1 HT32F65C40F Peripheral Component Reference Circuit

The following figure shows the HT32F65C40F_Driver Board peripheral component reference circuit which uses a charge pump driving structure with an integrated 32V half-bridge N-channel MOSFET. The total internal resistance of the high-side and low-side MOSFETs is 450mΩ. The driver includes an integrated dead time function. The integrated 5V LDO can supply power for the MCU circuit. The device contains both over temperature protection and output short-circuit protection.

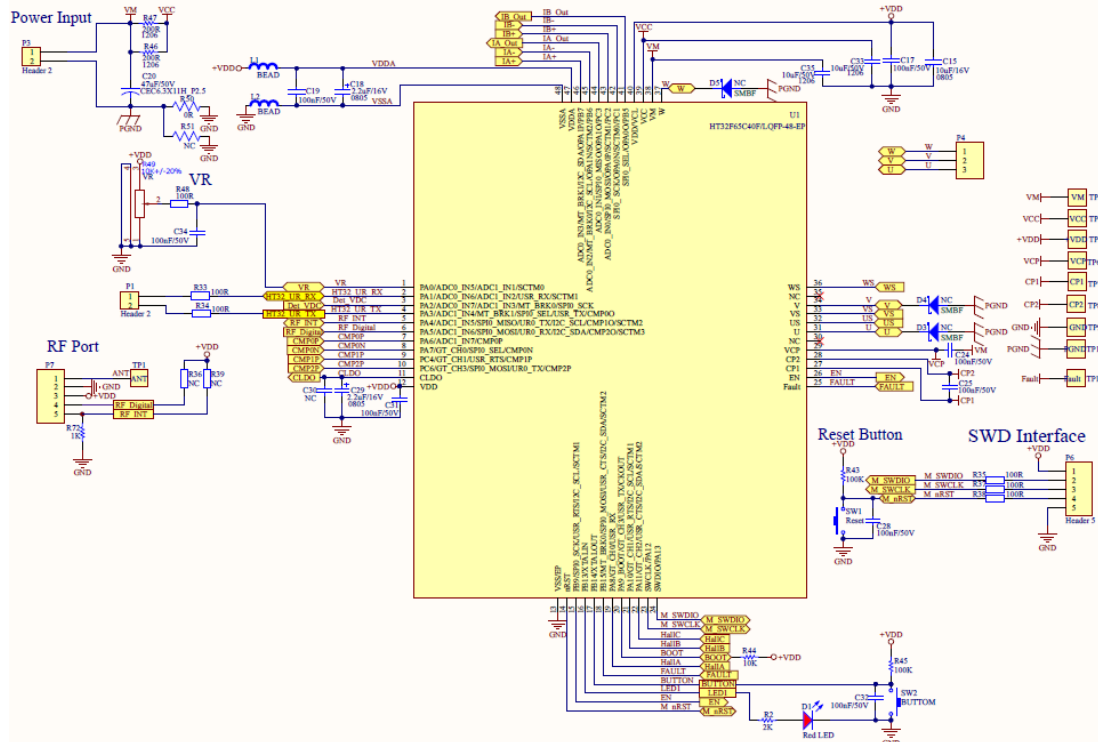


Over Current Protection Circuit

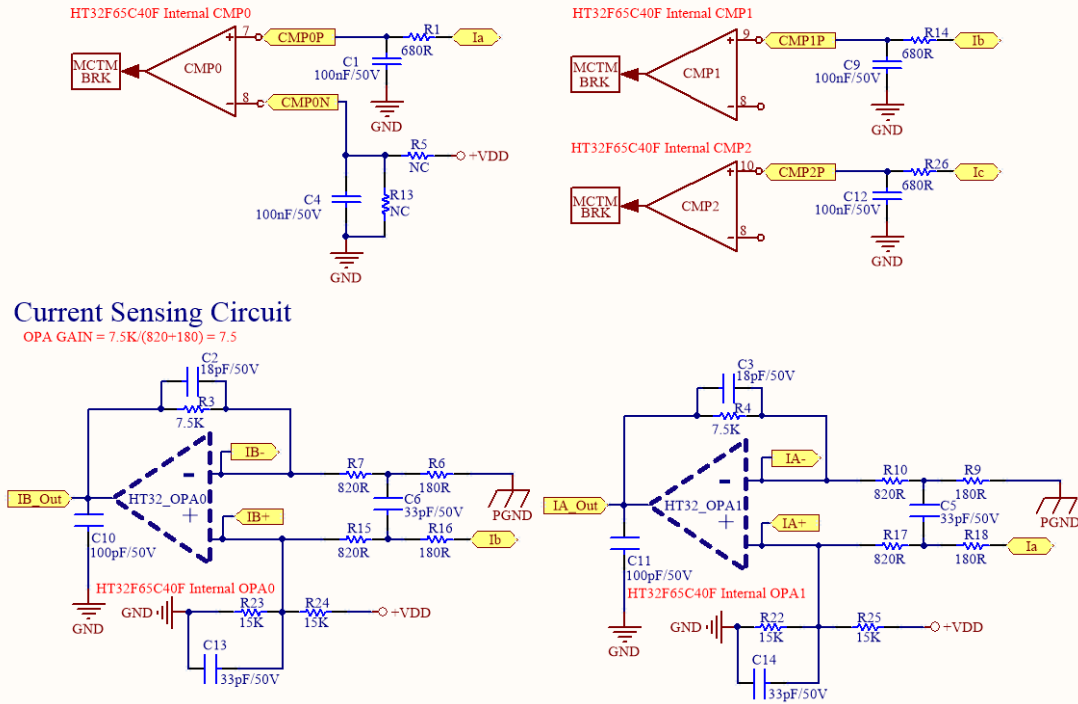

Over Current Protection Circuit and Current Sensing Circuit

2.3 Hall Sensor Feedback Circuit


The figure below shows the Hall sensor feedback circuit. Connect the three Hall signals to pin2~pin4 of the P2 pin header if the motor has three Hall sensors. The input Hall sensor signals will be pulled high to +VDD by pull-high resistors and then connect to the low-pass filter. After this, the filtered signals are input to the MCU for phase change signal processing.

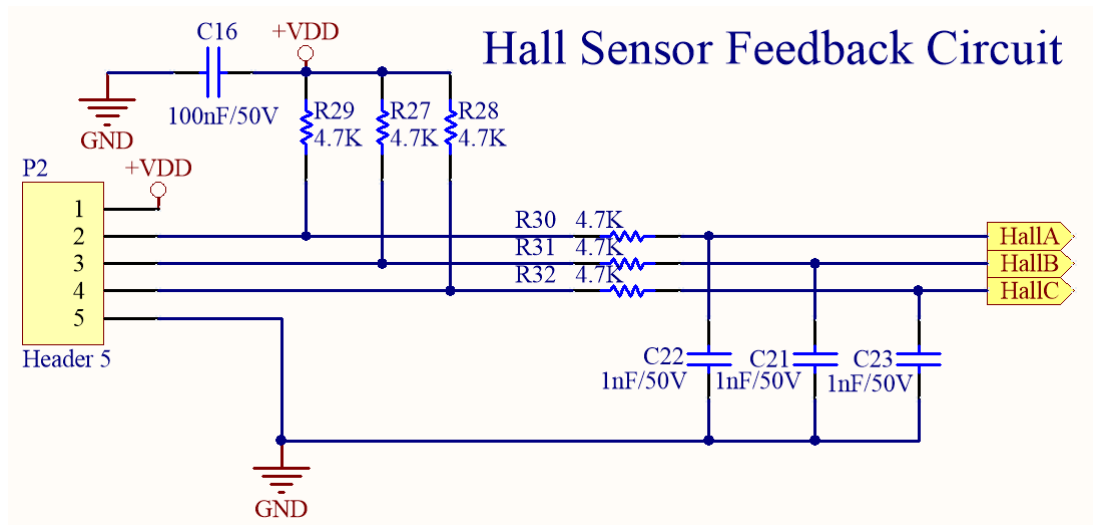

Hall Sensor Feedback Circuit

2.4 VR Variable Resistor Circuit


The figure below shows the VR variable resistor circuit. The VR divided voltage enters the MCU ADC after passing through a low-pass filter. In practical applications, the VR can be used as a human interface motor speed control function.

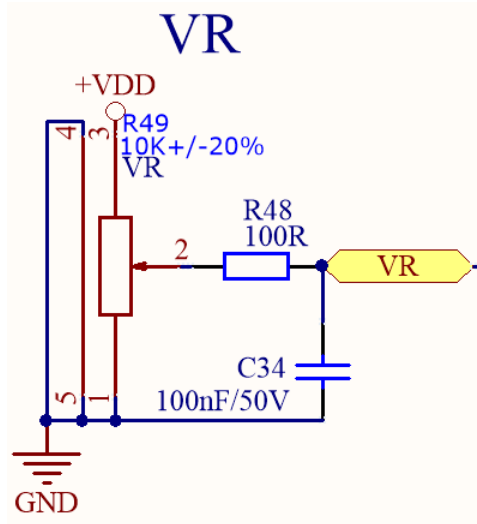

VR Variable Resistor Circuit


2.5 Programming Interface and Motor Workshop Communication

Check whether the hardware wiring of the HT32F65C40F_Driver Board is setup normally. As shown in the figures below, there are 4 places to be checked: (1) e-Link32 Pro programming wiring; (2) Input power wiring; (3) Motor wiring; (4) The communication line between the e-Link32 Pro and the workshop.

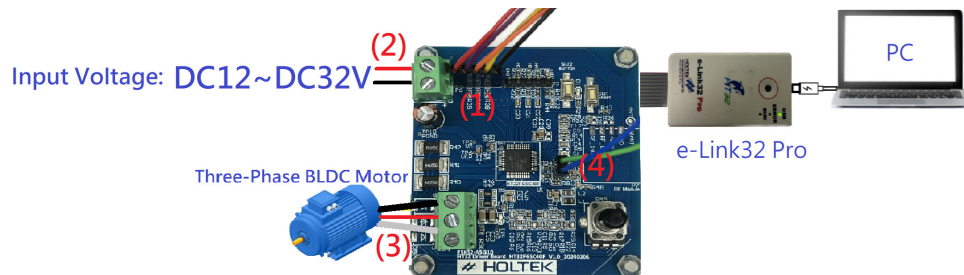


Check the HT32F65C40F_Driver Board Hardware Pre-setting Wiring

As shown in the figure above, connect the three-phase motor lines, black, red and white, to the HT32F65C40F_Driver Board terminals, U, V and W. Connect the e-Link32 Pro to the PC USB port using a Mini USB cable. Then, connect the e-Link32 Pro output port to the P6 pin header on the HT32F65C40F_Driver Board using Dupont lines, as shown in the following figures. The P6 pin header pins from left to right are 5V (red), SWDIO (purple), SWCLK (orange), nRST (yellow) and GND (black). The e-Link32 Pro output pin7 and pin8, the VCOM_RXD and VCOM_TXD pins, are connected to the USR_TX (green) and USR_RX (blue) pins on the P1 pin header on the HT32F65C40F_Driver Board respectively. Finally, connect the 24V power lines to the P3 screw terminal.




Pin#	Description	Pin#	Description
1 	5V	2 	SWDIO
3 	GND	4 	SWCLK
5 	GND	6 	Reserved
7 	NC (VCOM_RXD ^(Note))	8 	NC (VCOM_TXD ^(Note))
9 	GND	10 	Reset

e-Link32 Pro Output Port Definition

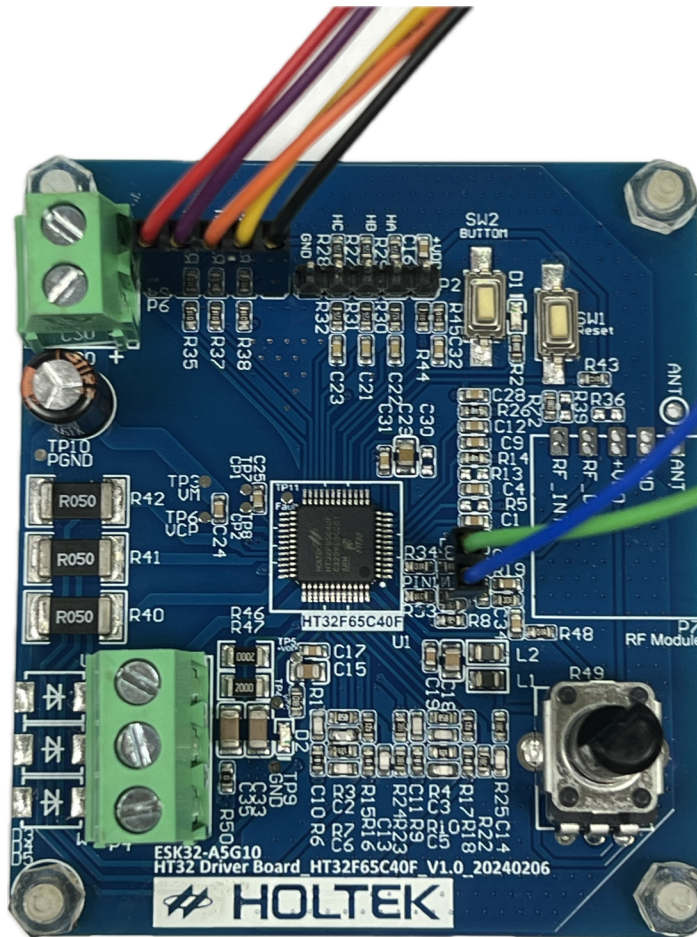


HT32F65C40F_Driver Board P1 and P6 Corresponding Programming Cable Color Reference

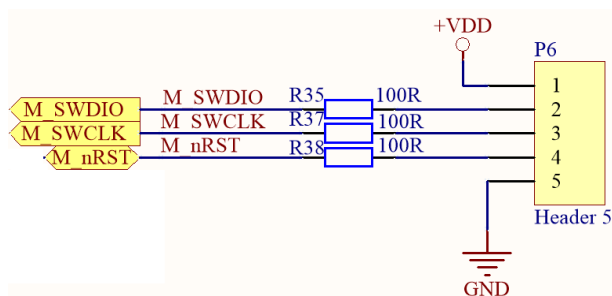

P6 Pin Definition

2.6 VCC Buck Resistors


As shown in the figure below, R46 and R47 are 200Ω by default and have a resistor footprint of 1206. When the input voltage exceeds 12V, it is recommended to modify the R46 and R47 resistors to more appropriate values to reduce the 5V LDO input voltage. The VCC current consumption is about 35mA under normal operation. The resistor voltage can be calculated using Ohm's law. It is recommended that VCC is kept within a range of 8V~12V to keep the device temperature within a reasonable range.

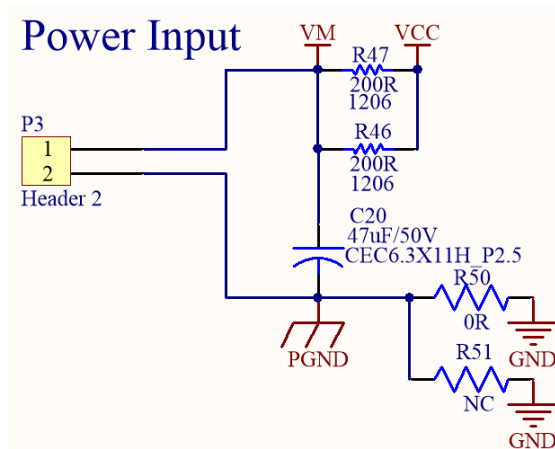

R46 and R47 Buck Resistors


2.7 RF Receiver Module

The figure below shows the Low-IF OOK receiver module with a 433MHz frequency band, the BM2302-64-1. If there are long-distance remote control requirements, users can purchase this module on the Best Modules official website. By default, the hardware board does not include this module.

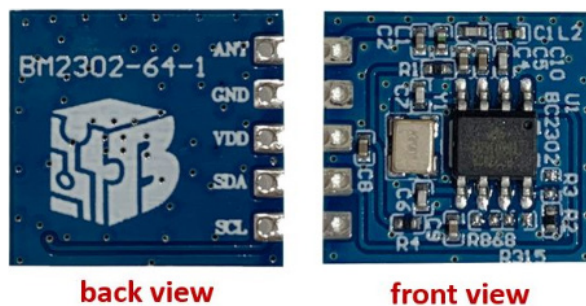

2.8 MCU Pin Function Definition

The figure below shows the HT32F65C40F pin circuit. Refer to the following table for the MCU pin function definitions.

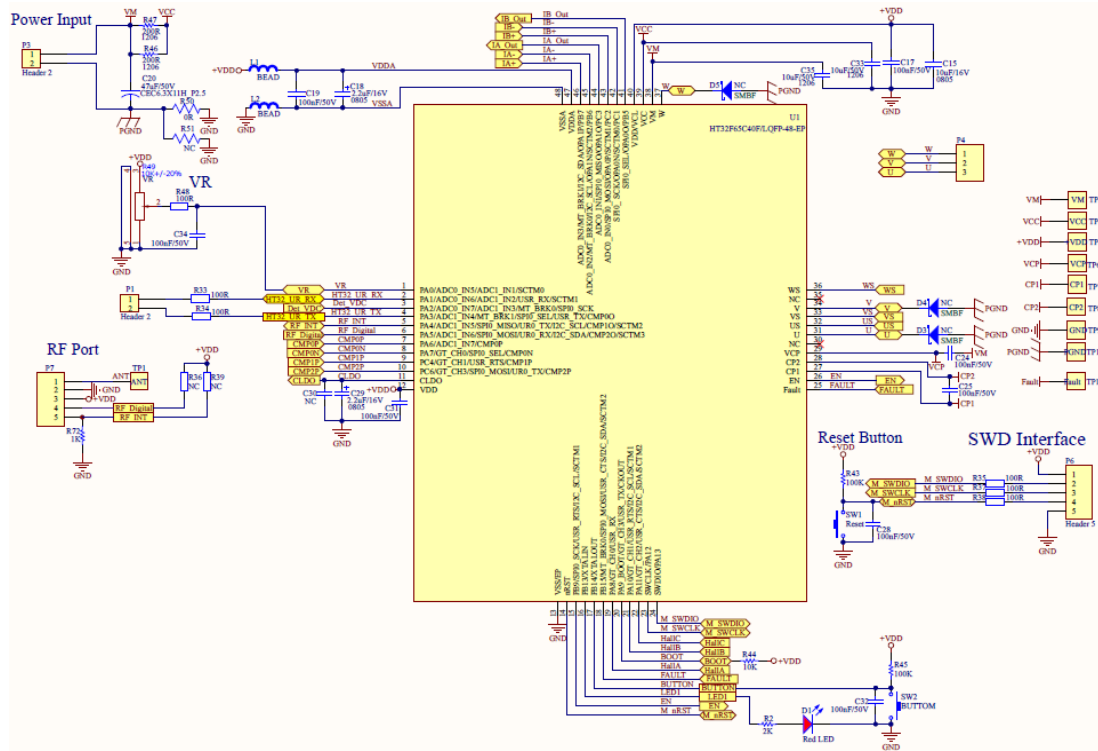

HT32F65C40F Pin Circuit Diagram

PA0 (VR)	PA1 (USR_RX)	PA2 (VDC)
PA3 (USR_TX)	PA4 (RF_INT)	PA5 (RF Digital)
PB9 (EN)	PB13 (LED1)	PB14 (Button)
PB15 (Fault)	PA8 (HSA)	PA10 (HSB)
PA11 (HSC)		


MCU Pin Function Definition

3. PCB Layout


The figures below show the HT32F65C40F_Driver Board PCB Layout. The detailed specifications are shown in the table below.

Length × Width	60×68 (mm)
Thickness	1.6 (mm)
Number of Layers	2
Copper Foil Thickness	1 (Oz)
Material	FR-4
Solder Mask Layer Color	Blue

HT32F65C40F_Driver Board Specifications

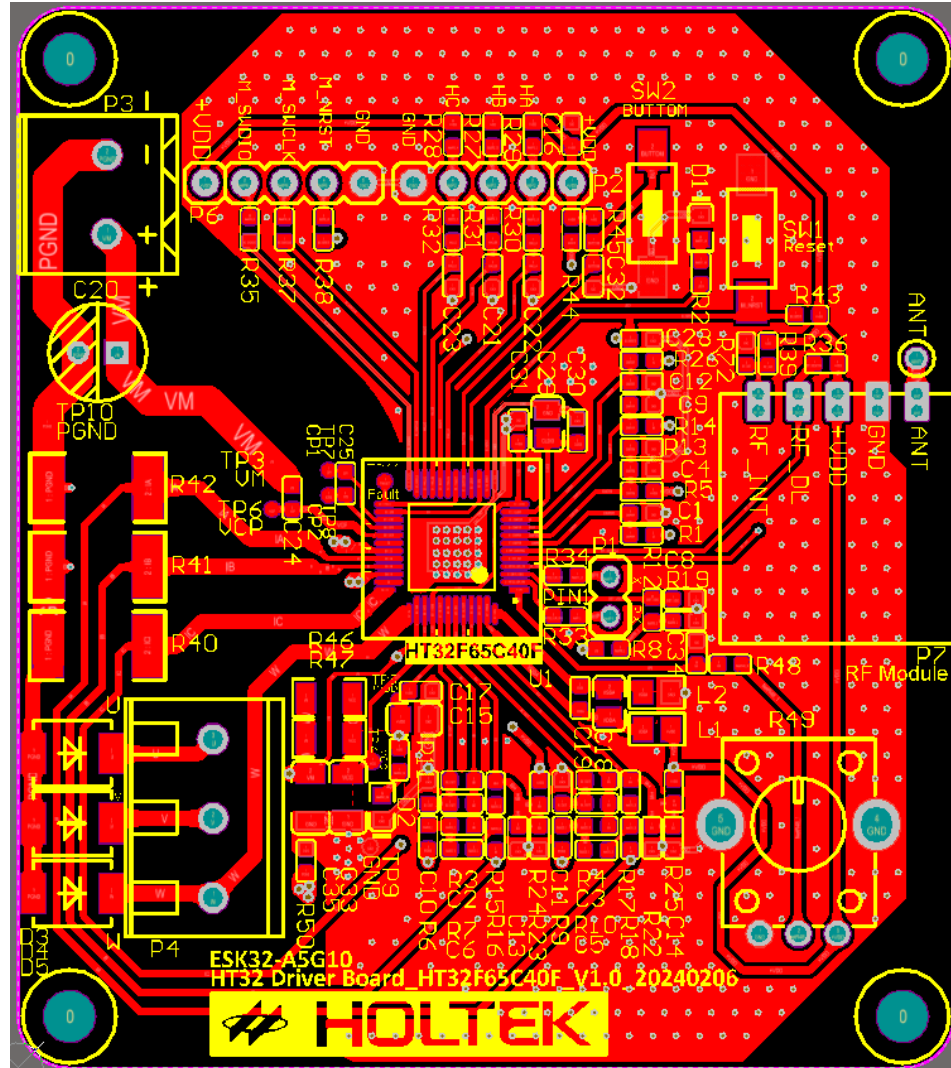

HT32F65C40F_Driver Board_Top Layer

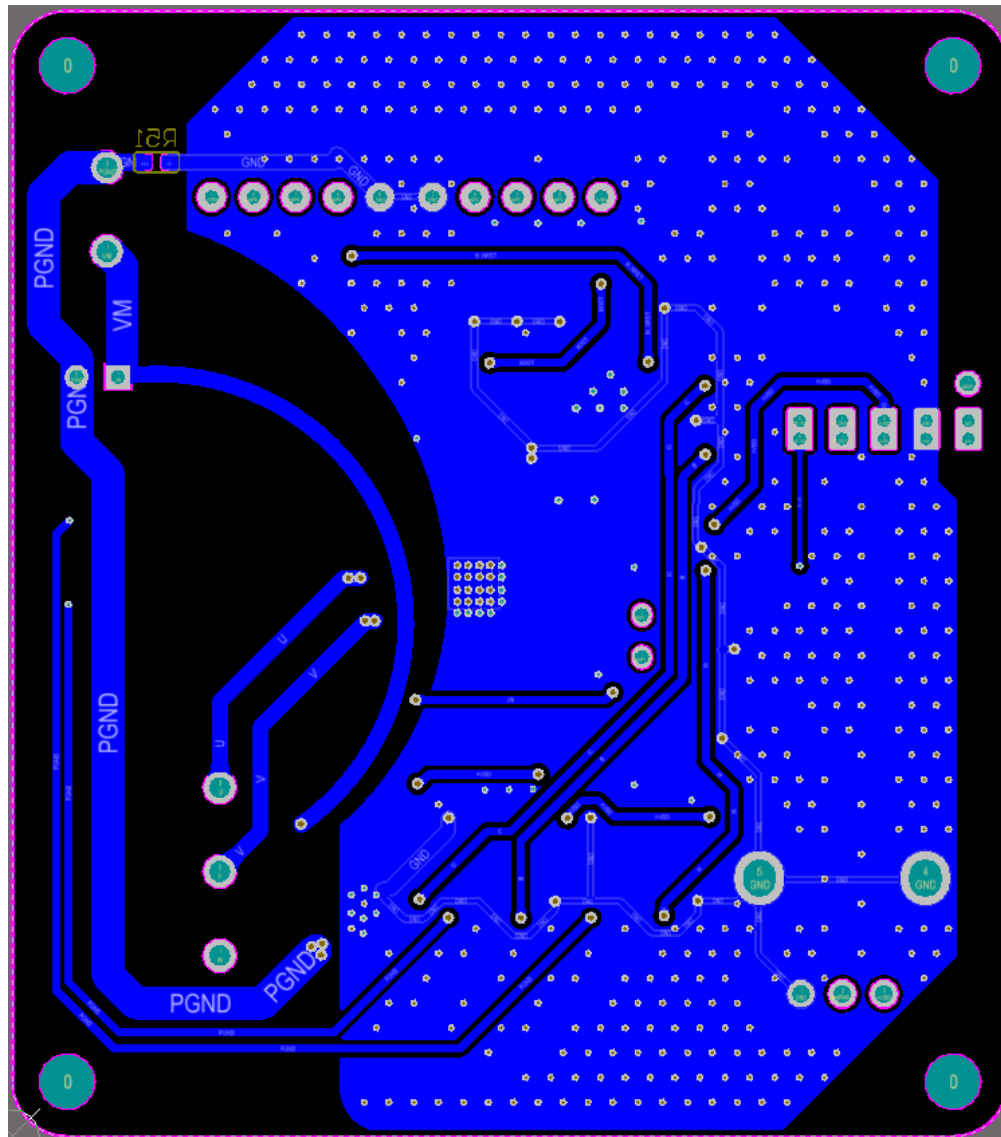

HT32F65C40F_Driver Board_Bottom Layer

4. BOM List

The following table shows the HT32F65C40F_Driver Board BOM List, which lists all the required circuit board components.

Comment	Description	Designator	Quantity	Footprint
HT32F65C40F	Motor Driver MCU	U1	1	LQFP48_EP
18pF±5% 50V NP0	MLCC	C3	1	0603
33pF±5% 50V NP0	MLCC	C5, C6, C13, C14	4	0603
100nF±10% 50V X7R	MLCC	C1, C4, C8, C9, C12, C16, C17, C19, C24, C25, C28, C31, C32, C34	14	0603
1nF±10% 50V X7R	MLCC	C21, C22, C23	3	0603
100pF±10% 50V NP0	MLCC	C10, C11	2	0603
2.2μF±10% 16V X7R	MLCC	C18, C29	2	0805
10μF±10% 16V X7R	MLCC	C15	1	0805
10μF±10% 50V X7R	MLCC	C33, C35	2	1206
Tact switch, TS-1101-C-W	SMD button	SW1, SW2	2	SMD
600MHz@100MHz	SMD bead	L1, L2	1	0805
SMD red LED, plain bright	SMD LED	D1	1	0603
SMD green LED, plain bright	SMD LED	D2	1	0603
100KΩ±1%	SMD resistor	R43, R45	2	0603
100Ω±1%	SMD resistor	R12, R33, R34, R35, R37, R38, R48	7	0603
10KΩ±1%	SMD resistor	R44	1	0603
1KΩ±1%	SMD resistor	R11, R72	2	0603
50mΩ±1%2W	SMD resistor	R40, R41, R42	3	2512
180KΩ±1%	SMD resistor	R8	1	0603
15KΩ±1%	SMD resistor	R22, R23, R24, R25	4	0603
4.7KΩ±1%	SMD resistor	R27, R28, R29, R30, R31, R32	6	0603
0Ω	SMD resistor	R50	1	0603
20KΩ±1%	SMD resistor	R19	1	0603
680Ω±1%	SMD resistor	R1, R14, R26	3	0603
7.5KΩ±1%	SMD resistor	R3, R4	2	0603
180Ω±1%	SMD resistor	R6, R9, R16, R18	4	0603
820Ω±1%	SMD resistor	R7, R10, R15, R17	4	0603
2KΩ±1%	SMD resistor	R2	1	0603
200Ω±1%	SMD resistor	R46, R47	2	1206
(P=2.54mm, 2Pin, 180 degrees)	Single row	P1	1	HEADER_1X2P
(P=2.54mm, 5Pin, 180 degrees)	Single row	P2, P6	2	HEADER_1X5P
47μF±20% 50V	DIP aluminum electrolytic capacitor	C20	1	CEC 6.3X11.2H_P2.5
(P=5.08mm, 3Pin, 180 degrees)	Screw type terminal	P4	1	DIP3W-5.08
(P=5.08mm, 2Pin, 180 degrees)	Screw type terminal	P3	1	DIP2W-5.08
10KΩ±20%, RK09K1130A5R	DIP variable resistor	R49	1	Through-hole
NC	MLCC	C30	1	0603
NC	SMD resistor	R5, R13, R36, R39, R51	5	0603
NC	SMD diode	D3, D4, D5	3	SMBF
NC	SMD RF module	P7	1	RF module

HT32F65C40F_Driver Board_BOM List

Copyright© 2024 by HOLTEK SEMICONDUCTOR INC. All Rights Reserved.

The information provided in this document has been produced with reasonable care and attention before publication, however, HOLTEK does not guarantee that the information is completely accurate. The information contained in this publication is provided for reference only and may be superseded by updates. HOLTEK disclaims any expressed, implied or statutory warranties, including but not limited to suitability for commercialization, satisfactory quality, specifications, characteristics, functions, fitness for a particular purpose, and non-infringement of any third-party's rights. HOLTEK disclaims all liability arising from the information and its application. In addition, HOLTEK does not recommend the use of HOLTEK's products where there is a risk of personal hazard due to malfunction or other reasons. HOLTEK hereby declares that it does not authorise the use of these products in life-saving, life-sustaining or safety critical components. Any use of HOLTEK's products in life-saving/sustaining or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold HOLTEK harmless from any damages, claims, suits, or expenses resulting from such use. The information provided in this document, including but not limited to the content, data, examples, materials, graphs, and trademarks, is the intellectual property of HOLTEK (and its licensors, where applicable) and is protected by copyright law and other intellectual property laws. No license, express or implied, to any intellectual property right, is granted by HOLTEK herein. HOLTEK reserves the right to revise the information described in the document at any time without prior notice. For the latest information, please contact us.