

## 免责声明

---



### Firmware Disclaimer Information

1. The customer hereby acknowledges and agrees that the program technical documentation, including the code, which is supplied by BEST HEALTH ELECTRONIC Inc., (hereinafter referred to as BestHealth) is the proprietary and confidential intellectual property of BestHealth, and is protected by copyright law and other intellectual property laws.
2. The customer hereby acknowledges and agrees that the program technical documentation, including the code, is confidential information belonging to BestHealth, and must not be disclosed to any third parties other than BestHealth and the customer.
3. The program technical documentation, including the code, is provided and for customer reference only. After delivery by BestHealth, the customer shall use the program technical documentation, including the code, at their own risk. BestHealth disclaims any expressed, implied or statutory warranties, including the warranties of merchantability, satisfactory quality and fitness for a particular purpose.

**Copyright (C) BEST HEALTH ELECTRONIC Inc.**  
**All rights reserved**

---

## PTM Timer说明

---

在定时/计数器模式下，比较器 A 或 P 分别将计数器与对应的 CCRA 或 CCRP 寄存器设置值进行比较，当比较结果相同时触发 CCRA 或者 CCRP 中断。定时/计数器模式无输出功能，一般应用于通用计时、计数功能需求场合。

## example 说明

---

此范例演示了 PTM 的 Timer 模式的使用

### 程序说明

---

1. `config sys clock`

PTM clock 来自系统时钟，因此系统时钟一定要配置正确

2. `config PTM to timer mode`

范例设置：时钟源为 Fsys/4，count = 500

$$T = 1/(F_{sys}/4)*count$$

- 4M :  $T=1/(4/4)*count = 500\text{ us}$
- 8M :  $T=1/(8/4)*count = 250\text{ us}$

### 3. enable SPTM

### 4. enable Interrupt : Non-required


根据需求设定

## 现象说明

连接 e-link 和目标板，将程序下载到 MCU 并运行

通过示波器测量 PA1 对应的输出波形

下图为 8 MHz 下 PA1 的波形提供参考，周期为 250 us

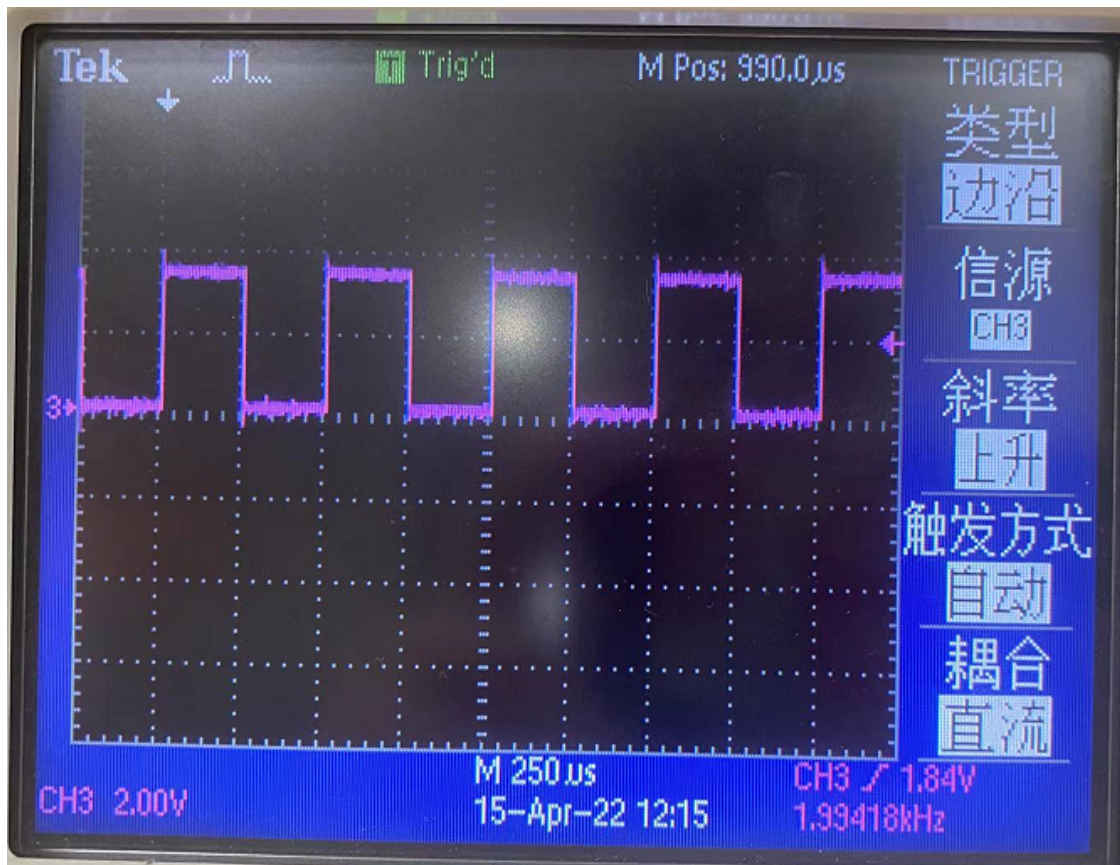

## FAQ

### 1. compare match output模式与timer模式有啥区别

两者的差异仅仅在于compare match output会输出信号到引脚，而Timer不会有任何信号输出到引脚，可将对应引脚作为普通 IO 使用

### 2. timer 模式和 counter 模式有什么区别

timer 模式和 count 本质没有任何区别，若计数时钟频率来自系统本身则可称之为 Timer 模式，若计数时钟频率来自外部引脚输入(通过设置 clockSource 实现)，则可称之为 counter 模式。

