


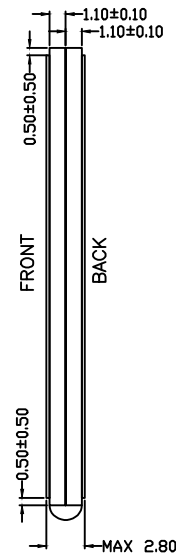


确认请签字回答:

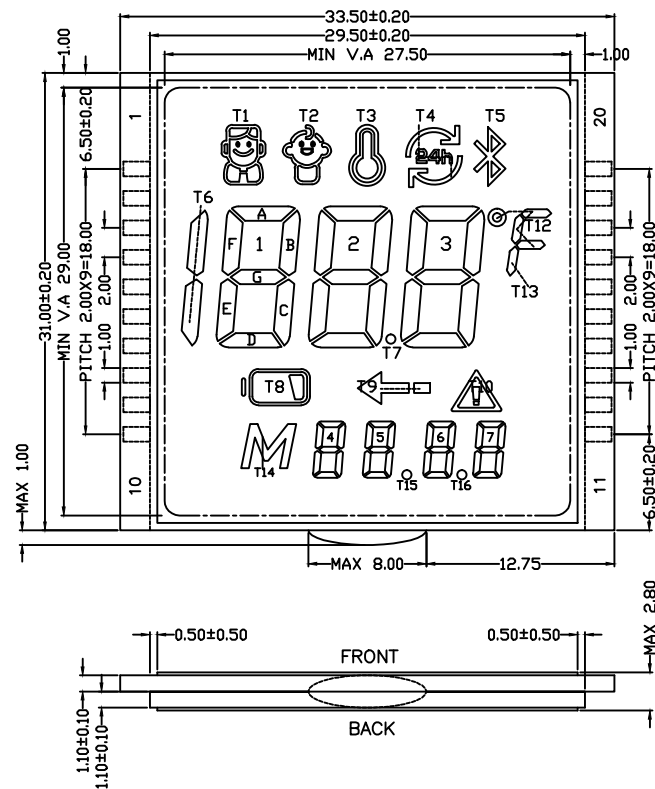


1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. VIEWING ANGLE: 6:00 O'CLOCK.
3. VIEWING MODE: POSITIVE TRANSMISSIVE
4. DISPLAY TYPE : TN
5. CONNECTION: ZEBRA
6. FLUID SPECIFICATION:
 - DRIVING VOLTAGE: 3.3V
 - MULTIPLEX LEVEL: 1/4DUTY, 1/3BIAS
 - OPERATING TEMP. : 0°C -- +50°C
 - STORAGE TEMP. : -20°C -- +70°C
7. FRAME FREQUENCY : 64HZ

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM1	T14	1F	1A	2F	2A	3F	3A	T8	T4	4D	T13	5D	T15	6D	T16	7D	COM1			
COM2	T3	1G	1B	2G	2B	3G	3B	T9	4E	4C	5E	5C	6E	6C	7E	7C		COM2		
COM3	T2	1E	1C	2E	2C	3E	3C	T10	4G	4B	5G	5B	6G	6B	7G	7B			COM3	
COM4	T1	T6	1D	T5	2D	T7	3D	T12	4F	4A	5F	5A	6F	6A	7F	7A				COM4

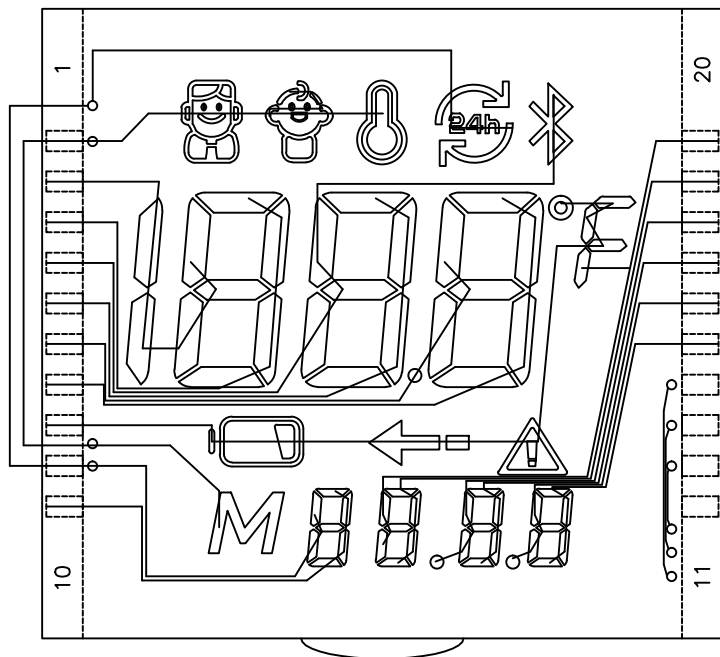


SEG

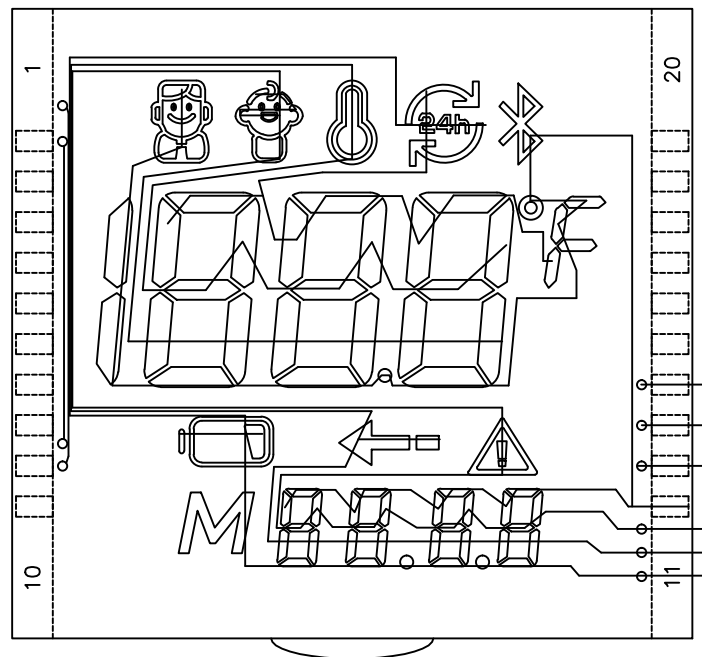

COM

可视区内有交点
此页图案仅供走

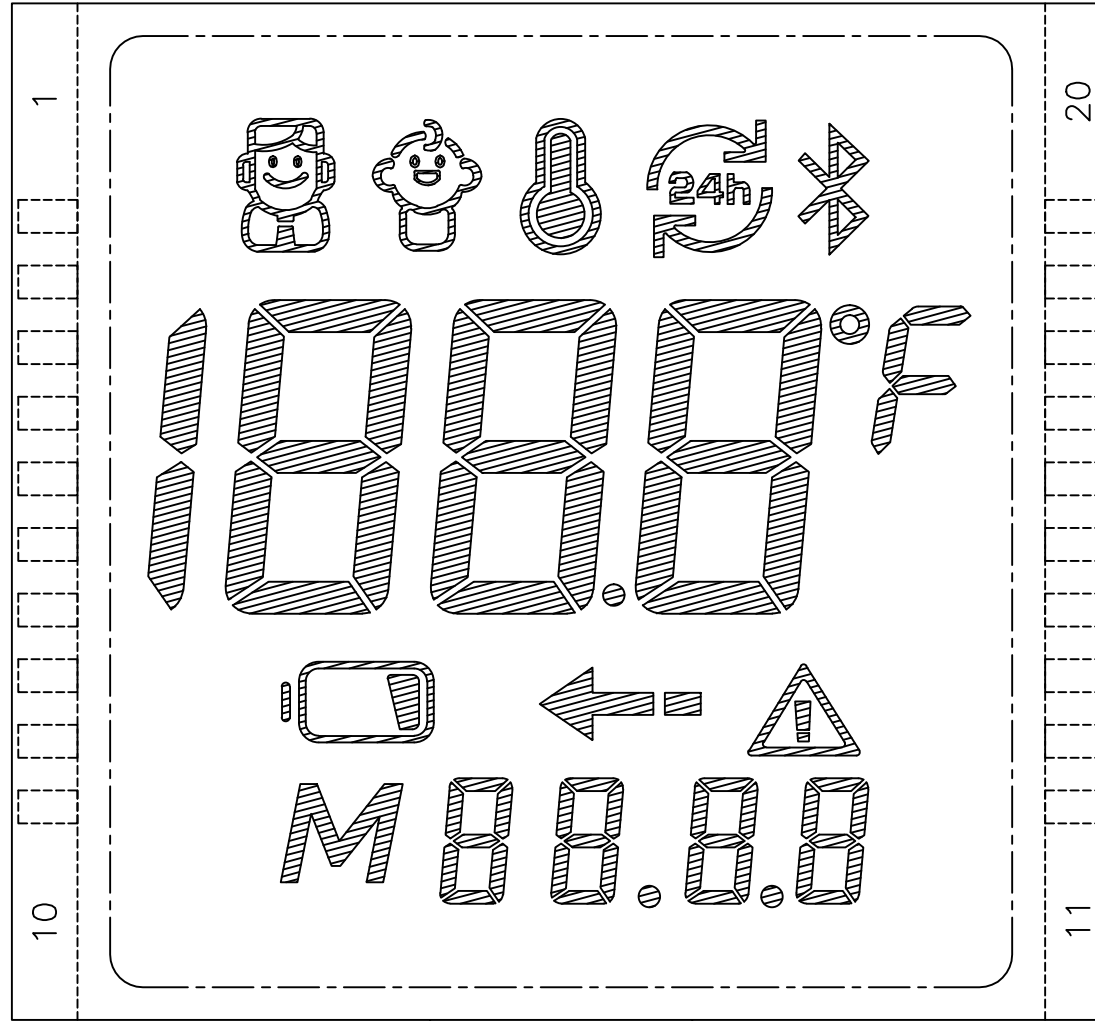

显示效果图